



4

3

2

1

INSTALLATION TYPE: BOTTOM SUPPORTED STRUCTURE APPLICATION
 DESIGN SERVICE TEMPERATURE: +6°F
 CRANE ACCESS LADDER CUSTOMER TO TRIM TO FIT

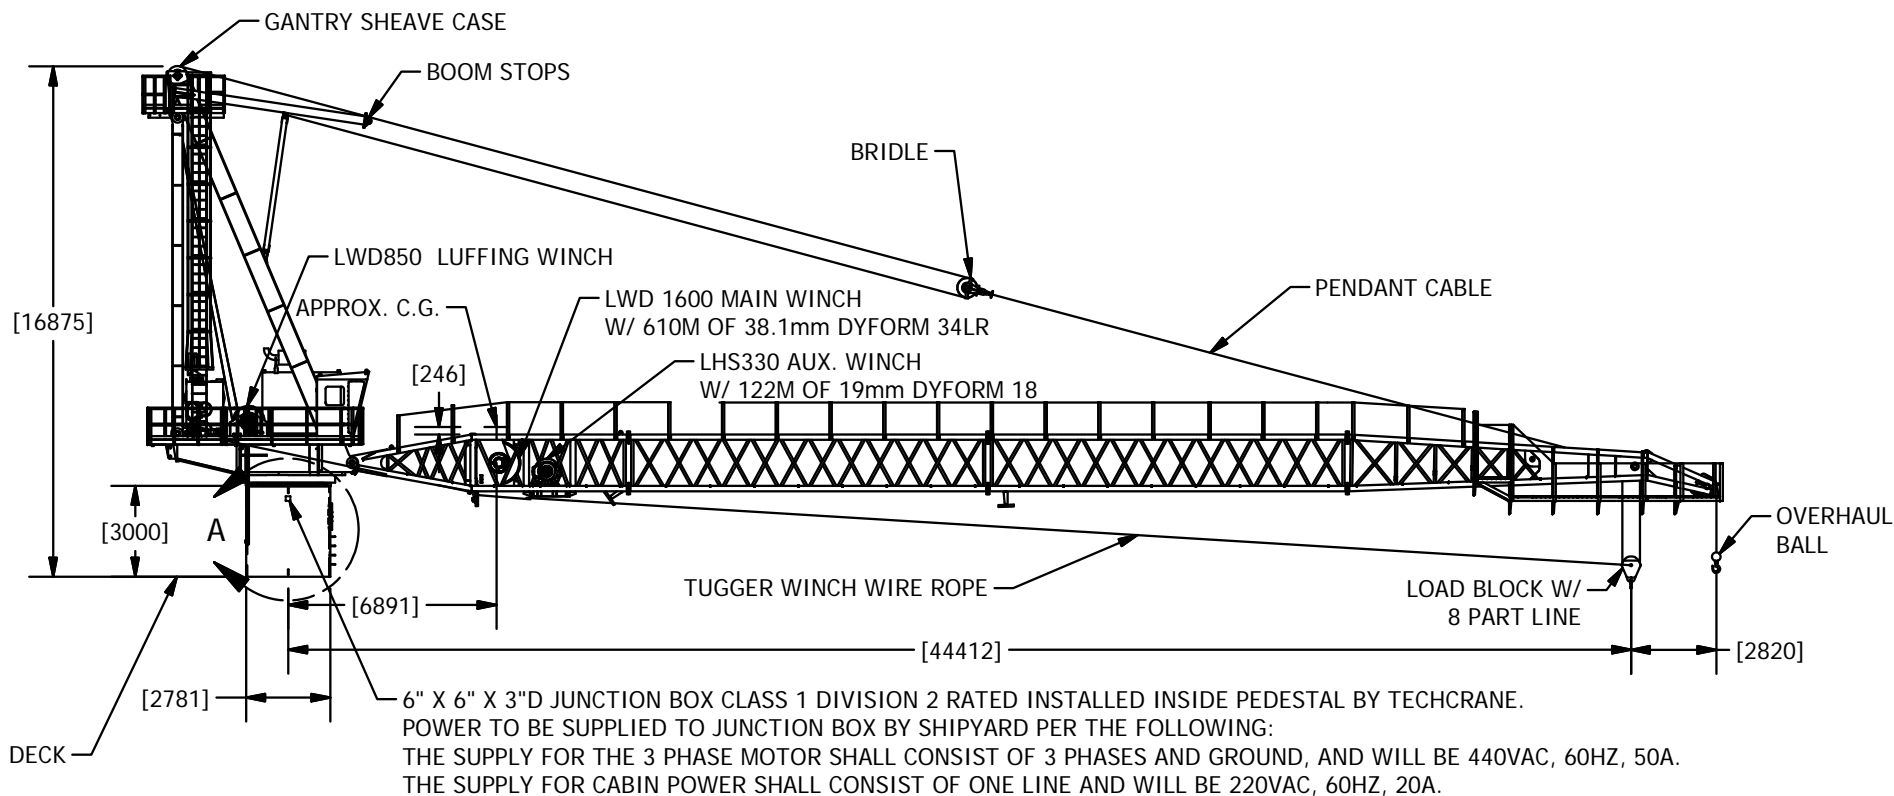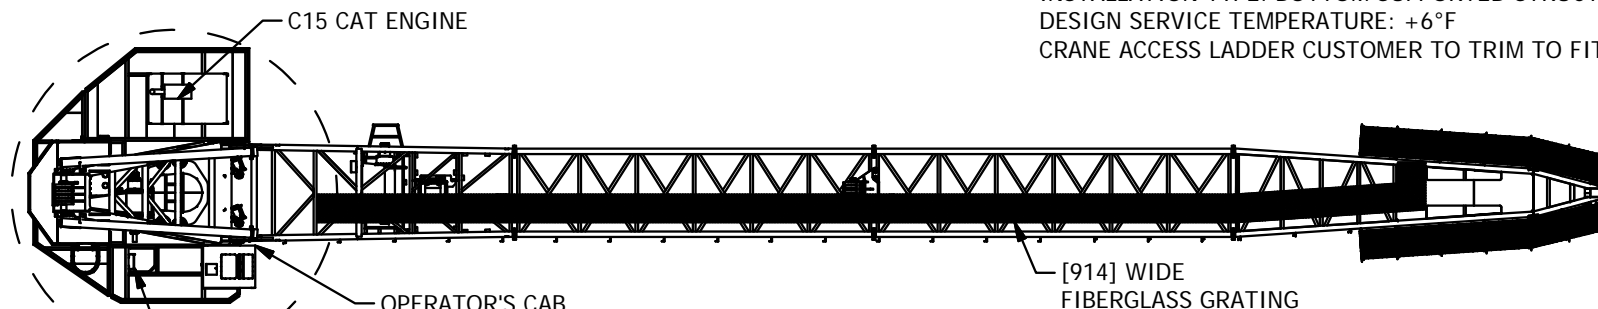

-Max overturning moment 32373 kip*ft and corresponding thrust 764 kips.

-Max thrust 921 kips and corresponding 24197 kip*ft.

-Max dead load moment 9000 kip*ft.

INFORMATION CONTAINED HEREON IS
 CONFIDENTIAL AND TRADE SECRET
 DO NOT DISCLOSE, USE OR REPRODUCE
 WITHOUT PRIOR WRITTEN APPROVAL
 FROM TECHCRANE INTERNATIONAL LLC.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES
 [] INDICATES MILLIMETERS

TOLERANCES

FRACTIONAL DIMENSIONS $\pm \frac{1}{16}$ \"/>

DESIGNED BY:

F. SHAD

DRAWN BY:

L. BAYLIS

WEIGHT:

N/A

APPROVED BY:

FILE NAME:

C:\1500 - SERIES CRANES\ASSEMBLY\1500 - MODEL GALILOID-140 SWISSCO JOB # 12851.dwg

MATERIAL NOTES:

1. BURN PER DIMENSIONS SHOWN.
2. PLATE FLATNESS AFTER BURNING TO BE WITHIN ASTM SPECIFICATIONS.
3. REFER TO API SPEC 2C LATEST EDITION.
4. WHERE APPLICABLE - ROLL FORM PER DIMENSIONS SHOWN.
5. WHERE APPLICABLE - TACK WELD AS REQUIRED TO SECURE ROLLED CAN.

DESIGN STATE:

WorkInProgress

MATERIAL:



TECHCRANE INTERNATIONAL, LLC.

17639 HARD HAT DRIVE COVINGTON, LA. 70435 U.S.A.
 PHONE (985) 871-0056 FAX (985) 871-0065

L500-140 GENERAL ARRANGEMENT
 SWISSCO JOB # 12851

DATE:

10/7/2015

REVISION NO.:

3.3

SHEET 1 OF 3

PART/DWG. NO.:

PRESENTATION

4

3

2

1